

7626 Easy Clean Graffiti Protection

A one pack single coat permanent non-sacrificial coating giving excellent protection against fly poster and graffiti attack. The product allows easy repeated removal of graffiti by using water/detergent. NOT a temporary or sacrificial, semipermanent graffiti protection.

PROPERTIES

- Transparent
- Permanent System (functional for up to 20 years and at least 20 times graffiti removal cycles)
- Graffiti is removable, in most instances
- With cold water and without chemicals
- Easy to re-coat in case of damage

7626 Graffiti Protection is ideally suited for locations which encounter regular graffiti events. It offers enormous flexibility in terms of application. It can be applied to almost all surfaces. The layer itself is also flexible and this characteristic is the reason why graffiti is unable to bond effectively, thus creating a world leading, vandal resistant finish.

It is completely resistant to ALL paints, permanent markers and the majority of acids. Simply wash with water and graffiti disappears and posters just slide off, providing permanent protection against graffiti attack – without ghosting residue.

7626 Graffiti Protection is ideal for (without primer) the following applications:

- Aluminium siding
- Concrete
- Fibreglass
- Glass*
- Masonry (includes brick, marble, stone, tile, granite and concrete)
- Metal*
- Steel
- Street Signs
- Stucco
- Utility Boxes
- Vinyl Siding
- Wood
- Plastic*

**Bonding to polished and smooth surfaces is not as profound as bonding to roughened or porous surfaces.*

Not applicable to plexi glass®

Single Component System – very strong bonding

One coat in most cases is sufficient (some highly porous surfaces may require a non-darkening primer coating or 2 coats of 7626 Graffiti Protection which can be applied within 30 minutes in hot environments and 3-4 hours below 20°C).

Open the can and roll it on. No mixing and no messing means less labour cost. In most instances the coloured variants can be used to „paint over“ existing graffiti. Also usable to protect „good graffiti“ (graffiti art).

It does not bond strongly to smooth surfaces such as stainless steel.

Tough resilient finish

Unlike most anti-graffiti systems, 7626 Graffiti Protection cures to an easy clean layer – with just one coat. The surface can be cleaned without using any graffiti remover. It is just enough to use a high pressure washer (max. 80 bar) or a brush. The surface offers a long protection lifetime and cleaning cycles over several years.

Rapid Curing

It's easy to apply, so it's not time-consuming, it means low labour costs and the coating is functional within hours.

Prolonged Protection – Zero Ghosting

Graffiti can normally be removed quickly and easily using just water. In most instances graffiti removal liquids are not necessary. It won't show any ghosting.

There is no need for reapplication after the graffiti has been removed. The clear finish does not yellow over time.

Clear and coloured



Available in a clear finish and in all RAL colours, MOQ 100L for coloured variants.

Long Term Protection

PACKAGING & SHIPPING

No „Dangerous Goods“ shipping fees

HS Code: 3910 0000, no DG

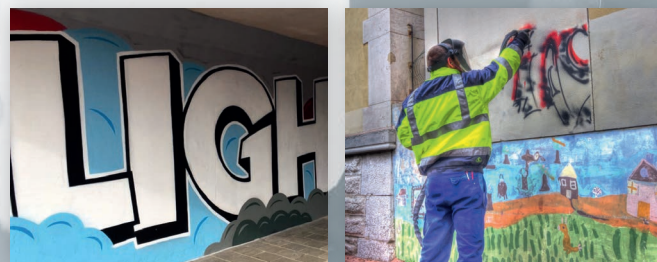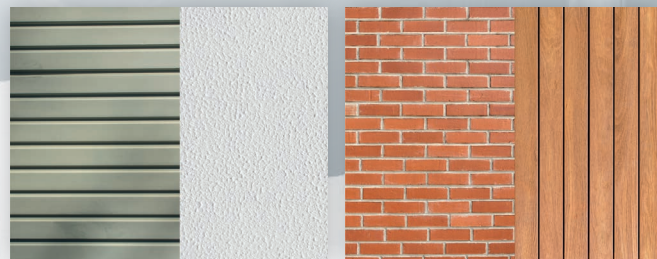

7626 Easy Clean Graffiti Protection

TECHNICAL SUMMARY

Quality	Description
Colour	Clear or pigmented liquid
Dilutable	No
Application	Application with brush roller or airless spray, (can't be applied with a conventional hvlp spray) Airless: - 16 thousand size tip or higher - cleaning: Nappy (white spirit)
Breathable	Yes
Urine-resistant	Yes
Paintable	Only with this pigmented Graffiti Protection 7626, not with standard paints
Volume Solids	78% matt; 78% gloss; 48% pigmented
Recommended Film Thickness	Depending on substrate and porosity, normally between 50-80 microns DFT
Coverage Rate	6 to 8 square metres / litre
Drying Time	Touch dry 3 / 4 hours; full cure 24 hours. Re-coating (if required) time 3 to 4 hours
Brushwash	Disposal
Weight Per Litre	0.90-1.02
Flash Point	Above 64°C
V.O.C.	50 grams per litre
Finish	Gloss - semi matt
Application Temperature	-5°C / +60°C
Storage Temperature	+5-+25°C, out of direct sunlight
Shelf Life	1 Year
High Pressure Cleaner	Max. 80 bar at 30-40 cm distance (flat jet nozzle, NOT dirt milling machine or point jet nozzle, apply the nozzle from the outer edge of the graffiti to be removed)
Surface Preparation	All surfaces must be clean and dry, remove any soiling by power wash etc. Any soiling/graffiti apparent on painted surfaces e.g. masonry/rendered walls should be re-painted with good quality masonry exterior paint, prior to application. Non-darkening primer should be considered for application prior to top coat on all sandstone/brick surfaces.
Bundle	5 litre canister • 20 litre canister
Art. No.	7626-5, 7626-20



Essential Characteristics	Performance	Harmonised Technical Specification
Water Vapour Permeability	Class V2	EN ISO 7783-2
CO ₂ Permeability	>S0m	EN ISO 1062-6
Fire Rating	Class 1	BS 476 Part 7
Fire Rating	Class 0	BS 476 Part 6